


High Frequency Off Grid Solar Inverter

PV1800 VHM Series (2KW-5.5KW)



Features


- Rated power : 2KW -5.5KW
- Pure sine wave solar inverter
- Output power factor 1
- High PV input voltage range
- Built-in 80A MPPT solar charger
- Battery equalization function to optimize battery performance and extend lifecycle
- Built-in anti-dusk kit for harsh environment
- Support parallel operation up to 3 units (available for 3KW-5.5KW 48V)

Introduction


PV1800 VHM is a multi-functional inverter/charger, combining functions of inverter, solar charger and battery charger to offer uninterruptible power support in portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and acceptable input voltage based on different applications.

Back panel printing description


- | | |
|------------------------------|---|
| 1. LCD Display | 10. Parallel communication port (only for parallel model) |
| 2. Status Indicator | 11. Circuit breaker |
| 3. Charging Indicator | 12. AC input |
| 4. Fault Indicator | 13. AC output |
| 5. Function Buttons | 14. Fan |
| 6. RS-485 Communication port | 15. Battery input |
| 7. USB | 16. Power on/off switch |
| 8. Dry contact | 17. PV input |
| 9. Parallel switch | |

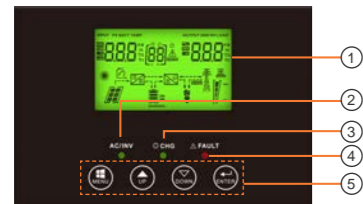


(2KW-3KW single model)

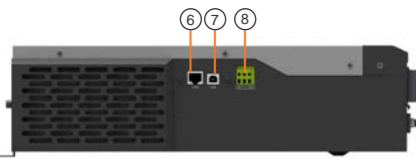

(2KW-5.5KW parallel model)

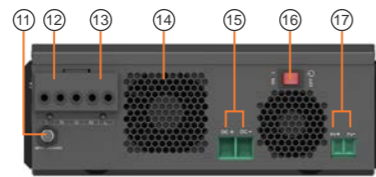


(2KW-5.5KW single model)

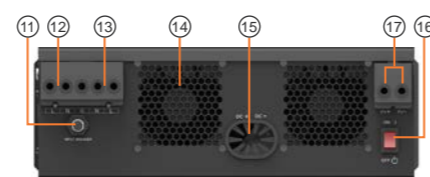

(2KW-5.5KW parallel model)

Solar system connection

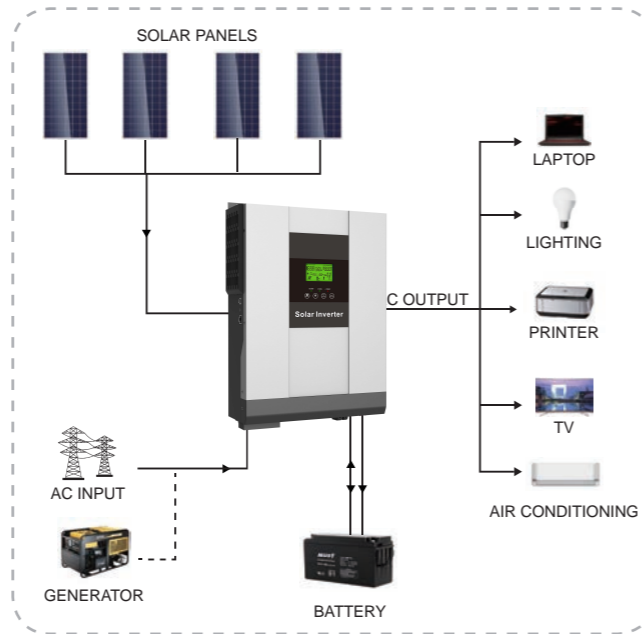

Specification

MODEL		PV18-2024 VHM	PV18-3024 VHM	PV18-3048 VHM	PV18-4048 VHM	PV18-5048 VHM	PV18-5548 VHM	
Nominal Battery System Voltage		24VDC		48VDC				
INVERTER OUTPUT	Rated Power	2000W	3000W	3000W	4000W	5000W	5500W	
	Surge Power	4000W	6000W	6000W	8000W	10000W	11000W	
	Waveform	Pure Sine Wave						
	AC Voltage Regulation (Batt.Mode)	(220VAC~240VAC)±5%						
	Inverter Efficiency(Peak)	93%						
	Transfer Time	10ms (For Personal Computers) 20ms (For Home Appliance)						
AC INPUT	Voltage	230VAC						
	Selectable Voltage Range	170~280VAC(For personal computer) \ 90~280VAC(For Home Appliance) \ 184~253VAC(VDE4105)						
	Frequency Range	50Hz/60Hz(Auto sensing)						
BATTERY	Normal Voltage	24VDC		48VDC				
	Floating Charge Voltage	27.4VDC		54.8VDC				
	Overcharge Protection	30VDC		60VDC				
SOLAR CHARGER & AC CHARGER	Maximum PV Array Open Circuit Voltage	145VDC						
	PV Array MPPT Voltage Range	30~130VDC		64~130VDC				
	Standby Power Consumption	2W						
	PV Input Power	2000W		4000W				
	Maximum Solar Charge Current	80A						
	Maximum Efficiency	98%						
	Maximum AC Charge Current	20A/30A		60A				
Maximum Charge Current	80A		140A					
MECHANICAL SPECIFICATIONS	Machine Dimensions(W*H*D)(mm)	272*355*100			297.5*468*125			
	Package Dimensions(W*H*D)(mm)	540*395*241			638*395*241			
	Net Weight(kg)	10	11	13.3				
	Gross Weight(kg)	11.7	12	16.4				
OTHER	Humidity	5% to 95% Relatly Humidity (Non-condensing)						
	Operating Temperature	0°C ~55°C						
	Storage Temperature	-15°C ~60°C						